

FACTORY SEAL

2.7"

SKIP TREAT

SKIP TREAT



helps prevent listed pests*



energy saving



fire resistant



reduces noise

FOR USE IN NEW CONSTRUCTION AND RETROFIT APPLICATIONS
ATTICS • FLOORS • WALLS • CRAWLSPACES • OVERLAY FIBER GLASS OR OTHER INSULATIONS • HOMES • SCHOOLS • RESTAURANTS • APARTMENTS & CONDOMINIUMS • OFFICES & INDUSTRIAL BUILDINGS • HOTELS & MOTELS HOSPITALS & NURSING HOMES

ACTIVE INGREDIENT:
Orthoboric acid 12.5%
OTHER INGREDIENTS 87.5%
TOTAL 100.0%

INSULATION MADE FROM RECYCLED PAPER
• Helps protect your home environment from annoying insects and other arthropods
• Contains 87% recycled paper
• Helps keep you warm in winter & cool in summer

• Fire resistant
• Highly resistant to air infiltration
• Helps deaden sound as an acoustical barrier
• This clean-blowing insulation is the result of a patented process.

KEEP OUT OF REACH OF CHILDREN CAUTION

FIRST AID

IF ON SKIN OR CLOTHING:

- Take off contaminated clothing.
• Rinse skin immediately with plenty of water for 15-20 minutes.
• Call a poison control center or doctor for treatment advice.

IF IN EYES:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing.
• Call a poison control center or doctor for treatment advice.

Have the product container or label with you when calling a Poison Control Center or doctor, or when going for treatment.

PRECAUTIONARY STATEMENTS: HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION. Harmful if absorbed through skin. Causes moderate eye irritation. Avoid contact with eyes, skin or clothing. Wash thoroughly with soap and water after handling.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

APPLICATORS, MIXERS, AND OTHER HANDLERS MUST WEAR:

- Long-sleeved shirt • socks, shoes • NIOSH-approved N95 or higher disposable or reusable particulate respirator
• Long pants • chemical-resistant gloves • dust goggles

READY-TO-USE OrkinTherm PRO is an insect/arthropod control insulation. This product is toxic to listed insects and other arthropods and is intended to help prevent their infestations in those building voids (attic, wall, between-floors, crawlspace) where the product is applied. Its toxic effect begins only after insect/arthropod contact with the product.

KILLS: Cockroaches, Termites (including Formosan Termites), Ants, Silverfish, Earwigs, Crickets, Sowbugs, Darkling Beetles, Millipedes, Centipedes and Booklice.

This insulation contains material toxic to these insects/arthropods and is intended to prevent new infestations in walls and attics where the product is applied. Control of insects/arthropods is limited to contact with insulation.

DIRECTIONS FOR USE

It is a violation of Federal law to apply this product in a manner inconsistent with its labeling. "R" means resistance to heat flow. The higher the R-value the greater the insulating power. To get the marked R-value, it is essential that this insulation be installed properly. Insulation applicators installing this material should be familiar with and carefully follow installation instructions from the manufacturer.

NOT FOR USE AS SOLE PROTECTION AGAINST TERMITES. Use of this product does not substitute for pre- and/or post-construction mechanical alteration, soil treatment or foundation treatment. For active termite infestations, you should consult a licensed pest control operator.

EASY AS 1 • 2 • 3

- ATTIC PREPARATION:
• Maintain attic ventilation. Insulation should not cover any attic ventilation. Use baffles or vent chutes. Do not cover soffit vents.
• Insulation should not cover or touch heat producing components like light fixtures. Create barriers to maintain a 3" clearance.
• Create a barrier around your attic access to keep the insulation in place when entering or exiting the attic.

FOLLOW INSTRUCTIONS FOR SET UP & OPERATION OF BLOWING MACHINE

- 1. Position Blowing Machine outside house. Plug in and attach 100' hose.
2. Run hose to attic through nearest access. Avoid tight turns.
3. Blow insulation into attic or on top of existing insulation to desired thickness/R-Value.


CAUTION!

TO HELP AVOID FIRE: Keep cellulose insulation at least three inches away from the sides of recessed light fixtures. Do not place insulation over such fixtures so as to entrap heat. Also keep this insulation away from exhaust flues of furnaces, water heaters, space heaters or other heat-producing devices unless the device is rated zero "0" clearance to combustibles. To be sure that insulation is kept away from light fixtures and flues, use a barrier to permanently maintain clearance around these areas. Check with local building or fire officials for guidance on installation and barrier requirements. Do not install or use cellulose insulation around heat or ignition sources or operations such as welding, metal cutting, grinding or other potentially flammable situations.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.
Pesticide Storage: Store product in a dry area.
Pesticide Disposal: Waste resulting from the use of this product must be disposed of on site or at an approved waste disposal facility.
Container Handling: Nonrefillable container. Do not reuse or refill this container. Completely empty bag into application equipment, then offer for recycling if available or dispose of empty bag in a trash can or by incineration.

*Effective against Cockroaches, Termites (including Formosan Termites), Ants, Silverfish, Earwigs, Crickets, Sowbugs, Darkling Beetles, Millipedes, Centipedes, and Booklice.

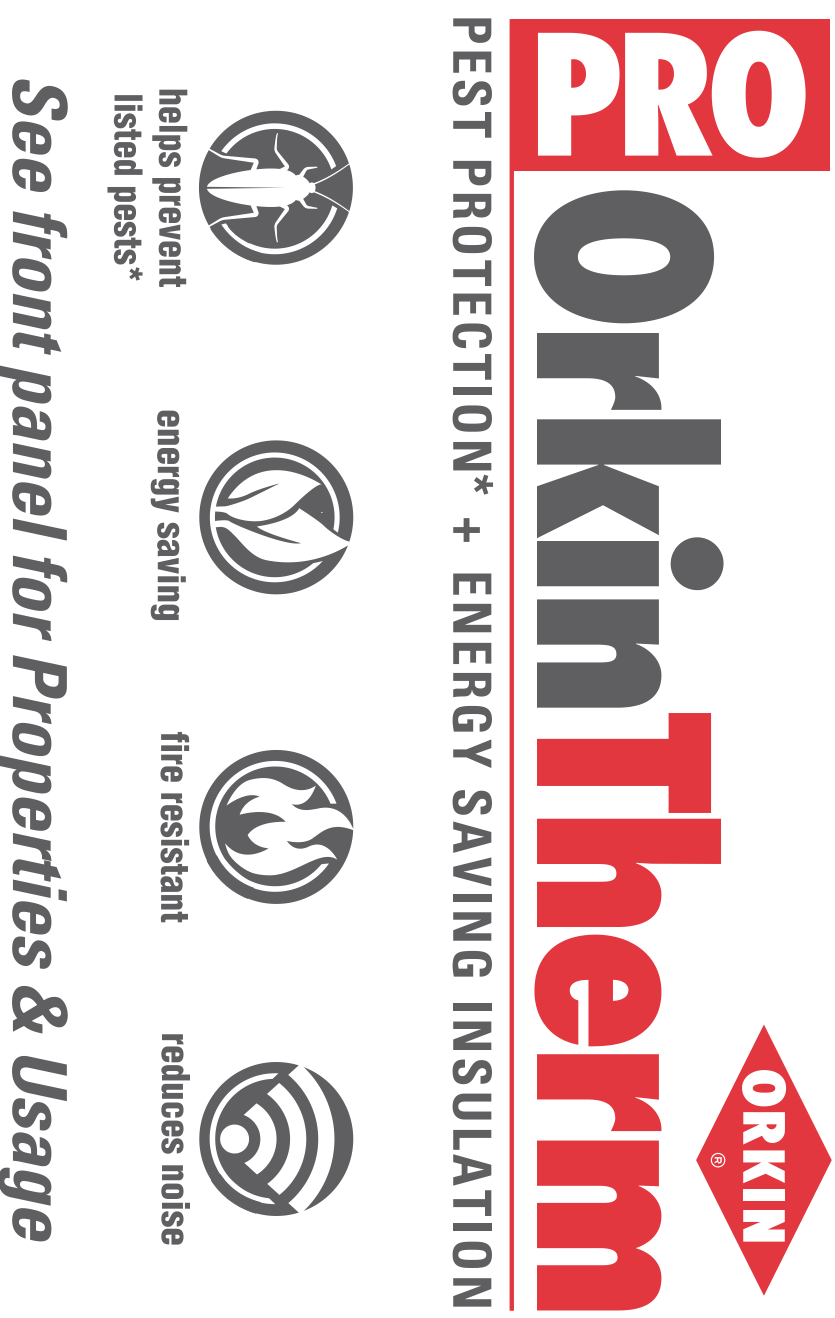

See front panel for Properties & Usage

ORKINTHERM PRO PEST CONTROL INSULATION COVERAGE CHART (ATTICS) BAG WEIGHT: 30LBS

ORKINTHERM PRO PEST CONTROL INSULATION COVERAGE CHART (WALLS) BAG WEIGHT: 30LBS

UL Classified logo and text: Classified in accordance with the following ASTM C719 Characteristics...

EPA REG. NO. 89140-1
US PATENT NO 6,578,782
Class 1 or Class A Building Material Determined by ASTM E 84 for smoke Developed index less than 450. Meets ASTM C 739 and all FHA, VA and HUD building code requirements.



Manufactured for
Pest Control Insulation LLC
5285 Mountain Center Plaza
Lula, GA 30554

ATTIC CARD
STATEMENT OF COMPLIANCE FOR LOOSE FILL INSULATION:
THIS INSULATION HAS BEEN INSTALLED IN CONFORMANCE WITH THE ABOVE REQUIREMENTS AND PROVIDE A VALUE OF R-____ USING ____ BAGS OF INSULATION TO COVER ____ SQUARE FEET OF AREA

OrkinTherm PRO logo with 'PEST PROTECTION* + ENERGY SAVING INSULATION' text and icons for pest prevention, energy saving, fire resistance, and noise reduction. See front panel for Properties & Usage

SKIP TREAT

SKIP TREAT

SKIP TREAT

SKIP TREAT